




SCHOTT
glass made of ideas

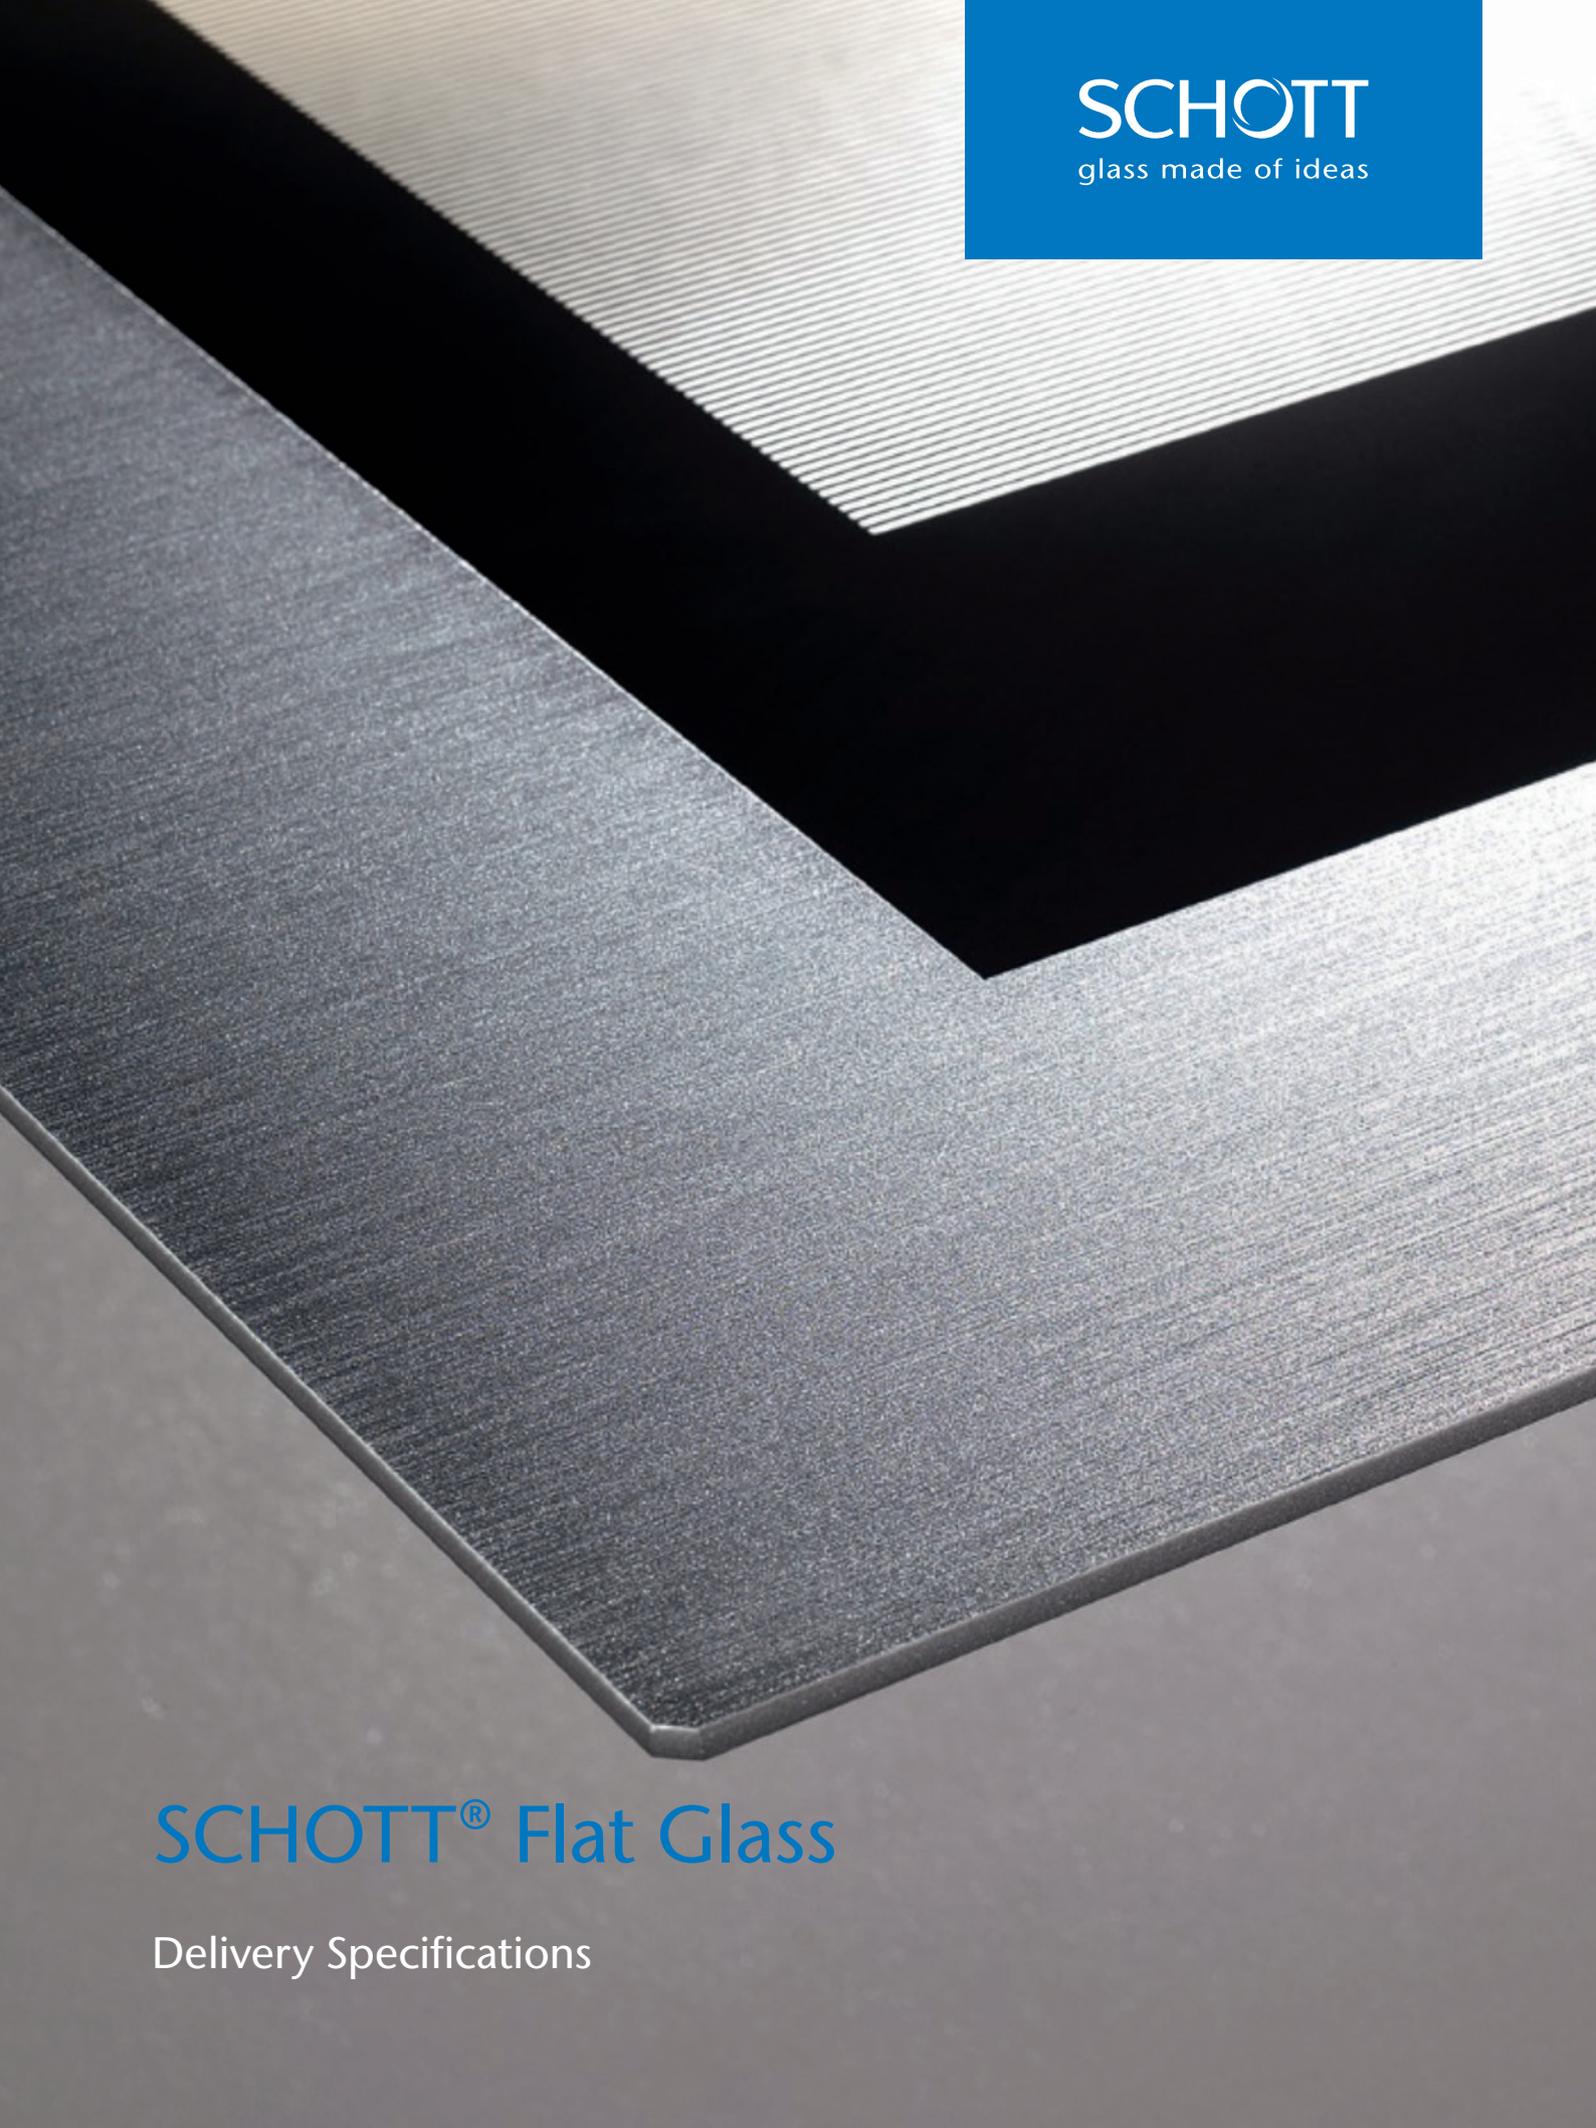

SCHOTT® Flat Glass

Delivery Specifications

SCHOTT® Flat Glass

Delivery Specifications

Table of Contents:

1. General	4	2.10 Corner Work	7
1.1 Description	4	2.10.1 Oblique Corners	7
1.2 Areas of Application	4	2.10.2 Dubbed Corners	7
1.3 Availability	4	2.10.3 Radius Corners	7
2. Technical Data	5	2.11 Screen Printing	8
2.1 General	5	2.11.1 Printing Process	8
2.2 Thickness	5	2.11.2 Printing Tolerances	8
2.3 Maximum Standard Width	5	2.12 Thermal Load Capacity	9
2.4 Maximum Standard Length	5	2.12.1 Maximum Operating Temperature	9
2.5 Deviations	5	2.12.2 Resistance to Thermal Shock (RTS)	9
2.6 Flatness	5	2.13 Mechanical Impact- / Shock-Resistance	10
2.7 Perpendicularity	5	3. Assembly Guidelines	11
2.8 Edge Work	6	Appendix	12
2.9 Holes and Cut-outs	6	A1. Strength	12
2.9.1 Holes	6		
2.9.2 Cut-outs	6		



SCHOTT® Flat Glass

Delivery Specifications

1. General

1.1 Description

SCHOTT® Flat Glass is a thermally toughened soda-lime flat glass. It is produced via the Float glass process and is mainly clear but can also be tinted or coated.

1.2 Areas of Application

Due to its particular resistance to thermal shock, temperature gradients and mechanical loads (e.g. bending and impact), SCHOTT® Flat Glass are ideal components for many applications.


For example this includes outer and inner oven doors, control panels, glasses for gas hobs and hoods, shelves and front panels for refrigerators, washer lids, glasses for commercial appliances, heater and boiler glasses, sanitary glass solutions and much more.

SCHOTT BOROFLOAT® is recommended for inner oven doors of pyrolytic backing ovens and other appliances with high demands on thermal and/or chemical resistance.

1.3 Availability

SCHOTT® Flat Glass products are usually supplied as flat panels. In addition to right-angled panels, also other shapes can be produced. Within a wide range of products, edges can be worked, holes can be applied, panels can be multi-printed – on both sides and according to customer requirements. Specific Enamels can be developed, and bent panels can also be supplied on special request.

Several other manufacturing processes are used to assemble i.e. plastic and/or metal components, like gluing, bonding, UV and ultrasonic welding, plastic injection molding, and also manual assembly.

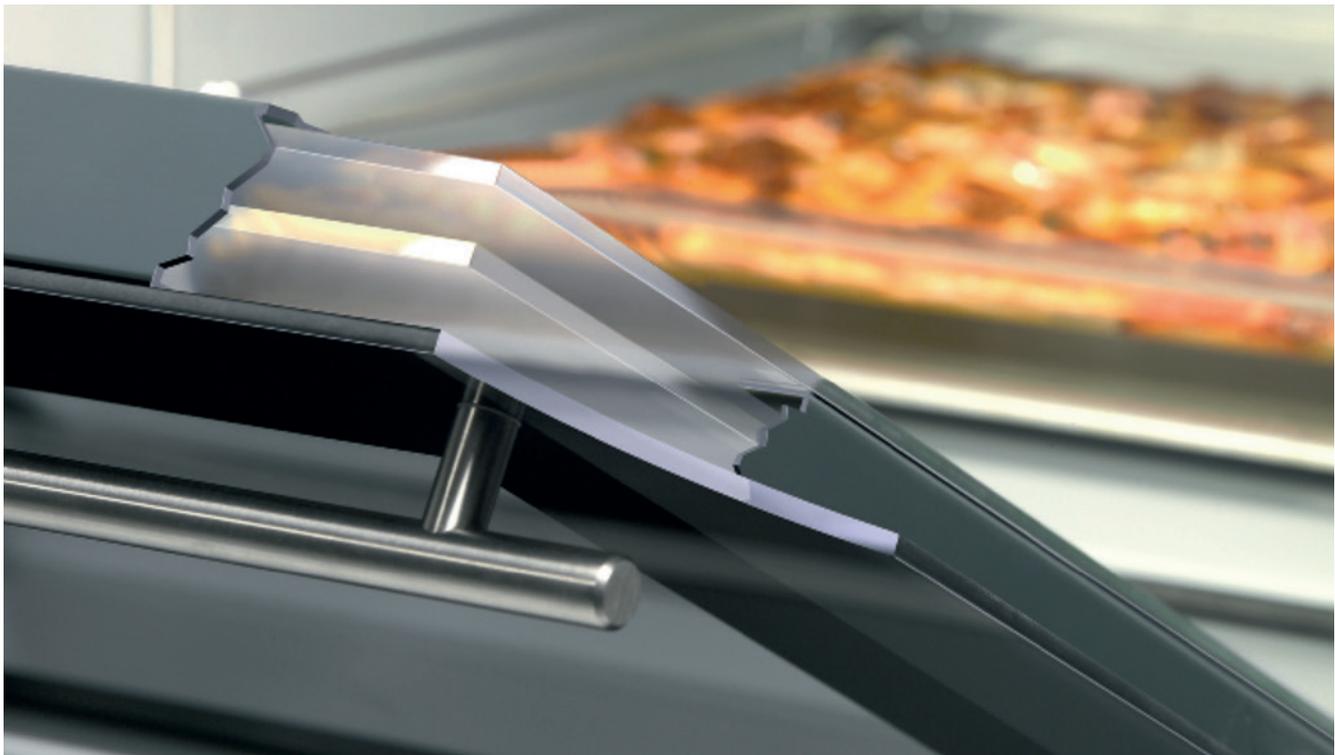

SCHOTT® Flat Glass

Delivery Specifications

2. Technical Data

2.1 General

Data, for which no general measurement method exists and which are not generally defined (e.g. by a norm), are specified and explained in more detail in the appendix.

2.2 Thickness

Nominal Thickness (mm)	Tolerance (mm)
3–3.2	±0.2
4	±0.2
5	±0.2
6	±0.2
8	±0.3
10	±0.3

2.3 Maximum Stand. Width

1,200 mm (Other width on request).

2.4 Maximum Stand. Length

2,000 mm (Other length on request).

2.5 Deviations

Length/width tolerances:

± 0.5 mm (dimensions ≤ 1 m)

± 1.0 mm (dimensions > 1 m)

2.6 Flatness

Maximum deviation from flatness of 2 mm per 1000 mm length measured across the longest diagonal of the panel is permitted (overall bow). The out-of-flatness will be measured as the greatest right angled distance between a fixed vertical reference level and the panels.

Roller waves (local bow) are caused by the glass moving across rollers at high temperatures. Maximum deviation of this local bow of 0.3 mm per 100 mm length measured across the contour of the panel is permitted. This will give a slight waviness which varies with glass thickness and pitch of rollers.

2.7 Perpendicularity

Maximum deviation from perpendicularity is 0.05°. This corresponds to a deviation of 1.0 mm per meter.



SCHOTT® Flat Glass

Delivery Specifications

2.8 Edge work

The edges are typically ground but can be arrised or polished on request. A wide range of edge profiles are available like bevelled, C-ground or flat shaped.

2.9 Holes and Cut-outs

Hole diameter: 3.5 to 300 mm. Other dimensions on request.

2.9.1 Holes

Hole Diameter(mm)	Diameter Tolerance (mm)	Position Tolerance (mm)
= 3.5 to 100	±0.5	±0.3
> 100 to 300	±1.0	±0.3

	Hole Diameter up to 60 mm	Hole Diameter 60 to 300 mm
Minimum distance between edge of hole and edge of glass	Double glass thickness or 1.5 times diameter of the hole; the large value applies up to a maximum of 50 mm	= 50 mm (smaller distance on request)
Minimum distance between two holes	Four times glass thickness	= 50 mm (smaller distance on request)

2.9.2 Cut-outs

In addition to regular round drilled holes, other types of cut-outs (e.g. rectangular and oval) are also available. Dimensions and tolerances on request.




SCHOTT® Flat Glass

Delivery Specifications

2.10 Corner Work


2.10.1 Oblique Corners

These are cut at a certain angle (e.g. 45°) in accordance with the customer requirements. Measurements are expressed in the sketch below. Angle tolerance is $\pm 10^\circ$.

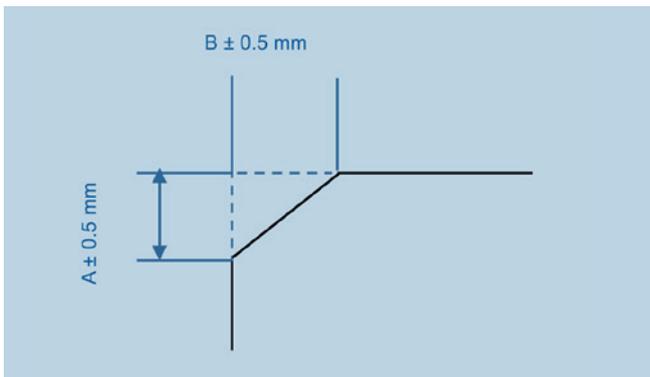

2.10.3 Radius Corners

The smallest possible standard radius is 3 mm. The tolerance is ± 0.5 mm (smaller radii are available on request).

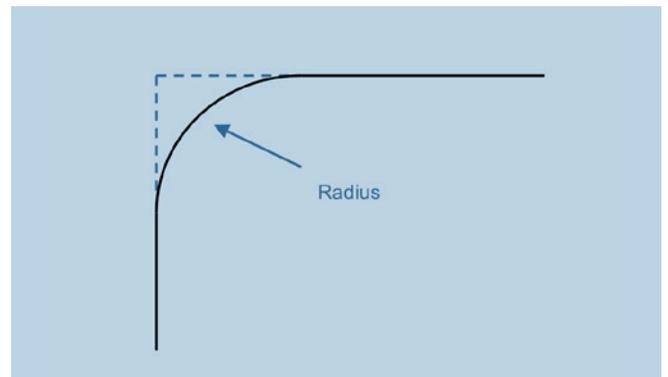


2.10.2 Dubbed Corners

A dubbed corner has a smooth surface and makes the handling and assembly of the panels safer and easier (dub = 0.5 to 2.0 mm of glass).

Dimensional tolerances are:

- $1 < \alpha \leq 3$ mm : $+1 / -0.5$ mm
- $\alpha \leq 1$ mm : ± 0.5 mm

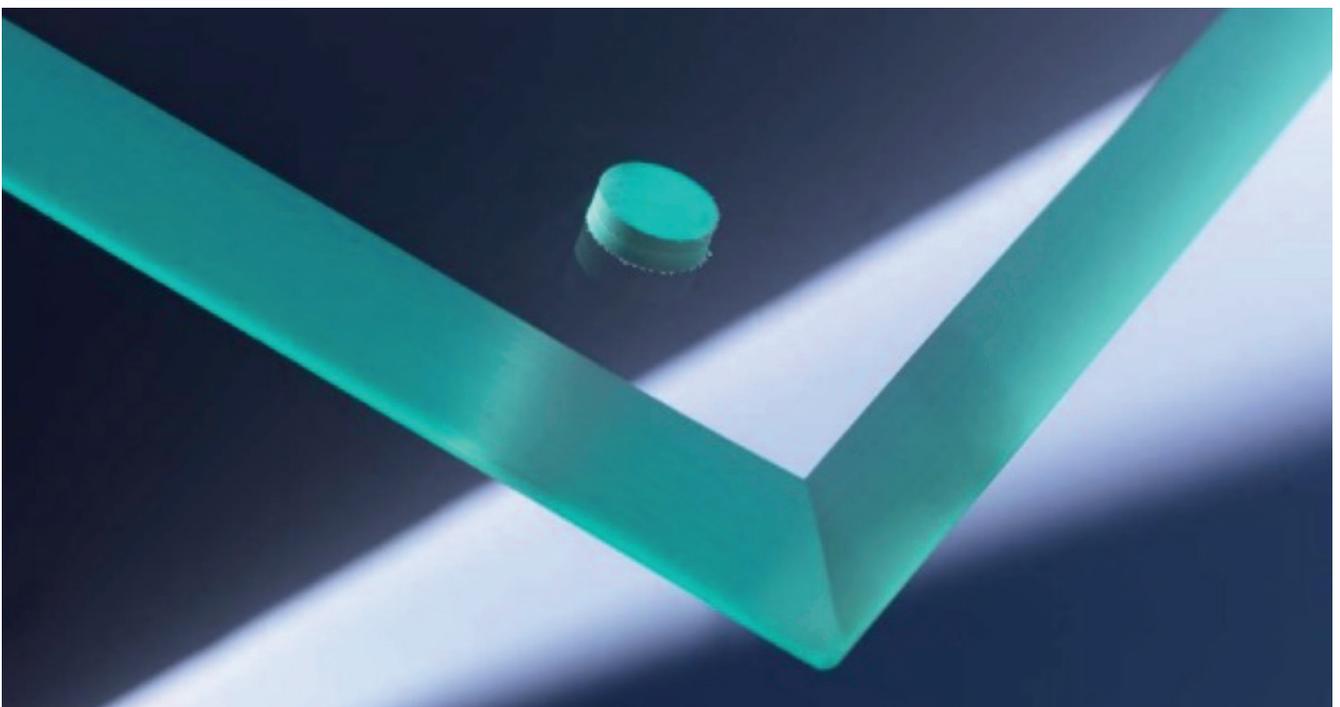

SCHOTT® Flat Glass

Delivery Specifications

2.11 Screen Printing

2.11.1 Printing Process

Two types of colors are available for printing on SCHOTT® Flat Glass:


- ceramic colors
- organic colors¹⁾

Ceramic colors are suitable for high temperatures and are therefore applied when the temperature of the glass panels will exceed 150 °C when in use. Organic colors may be used when the glass panel temperature is under 150 °C when in use. These colors can also be used in a transparent form as “color filters” for lighting purposes (for example in control panels).

Both color types can be used in combination on the same panel and both are applied using the silk-screen printing process.

Almost all color shades are available²⁾.

2.11.2 Printing Tolerances

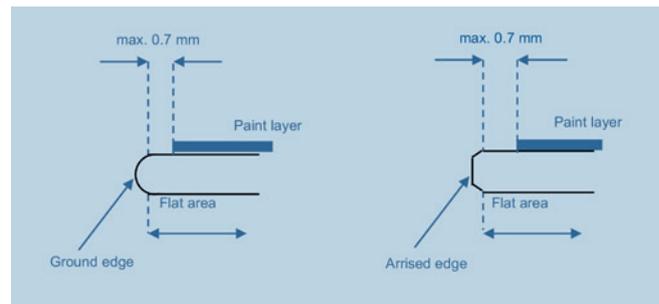

Minimum thickness of a printed line: 0.5 mm

Minimum diameter of a printed dot: 0.5 mm

Tolerance between two printed operations: ≤ 0.3 mm

¹⁾ This type of color cannot be used on bent glass.

²⁾ Bright red or yellow colors or blends with bright red or yellow colors have to be made of organic color dyes due to the ban of some hazardous substances by RoHS directive.



SCHOTT® Flat Glass

Delivery Specifications

2.12 Thermal Load Capacity

2.12.1 Maximum Operating Temperature

Depending on the temperature in practical use, some of the original level of toughening can be reduced in (thermally toughened) glass.

To be certain that we meet the requirements of practical use, toughening in SCHOTT® Flat Glass is permitted to be reduced to no less than 80% of the original level of toughening.

This is ensured, if the temperature-time-load capacities in the following table are not exceeded:

Maximum admissible:

SCHOTT® Flat Glass temperature	Max. permitted total time
280 °C	10 000 hours
290 °C	1 000 hours
300 °C	100 hours
310 °C	30 hours

2.12.2 Resistance to Thermal Shock (RTS)

Glass panels shall not fracture when exposed to thermal shock.

Statements on the thermal shock resistance can only be made on the basis of information pertinent to the relevant application (mainly in association with applications-specific standards to be fulfilled).

Example: The thermal shock resistance as required in EN 60335-2-6, clause 21 is met by SCHOTT® Flat Glass assuming the product is properly assembled.

Since the fulfillment of the above-mentioned standard is heavily dependent on the assembly into which the panel is built (e.g. the frame), each individual construction must be tested.



SCHOTT® Flat Glass

Delivery Specifications

2.13 Mechanical Impact- / Shock-Resistance


The impact resistance of SCHOTT® Flat Glass is a function of the manner of assembly, the size and thickness of the panel, the type of impact, the impact stress and many other parameters.

Consequently, statements on the impact resistance can only be made on the basis of information pertinent to the relevant application (mainly in association with application-specific standards to be fulfilled)¹⁾.

Example: The impact resistance as required in EN 60355-2-6, clause 21 is met by SCHOTT® Flat Glass when properly assembled.

Since the fulfillment of the above mentioned standard is heavily dependent on the assembly of the panel into the frame, each individual construction must be tested by the manufacturer.

¹⁾ See explanatory (Strength)

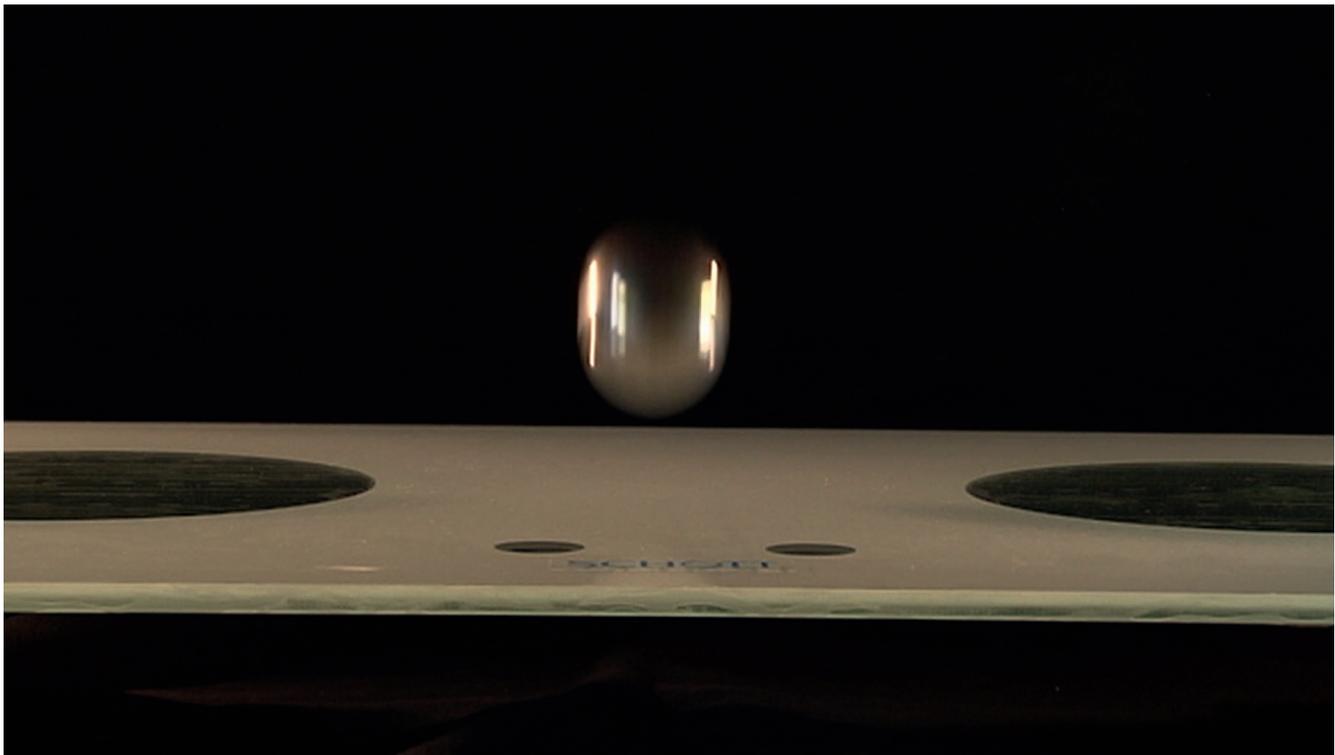

SCHOTT® Flat Glass

Delivery Specifications

3. Assembly Guidelines

The general conditions, as defined for the assembly of glass panels, also apply to SCHOTT® Flat Glass. The way in which the panel is fixed must not include additional stress on the glass panel. This is required because the thermal expansion coefficient is considerably lower than that of metal components which are mostly used to support SCHOTT® Flat Glass, it is important that this difference is absorbed.

We therefore recommend the use of a durable elastic seal. If required temperature resistant material that insulate SCHOTT® Flat Glass from metal or any other hard components such as silicone, mineral wool or aluminosilicate seals should be in place.

Dubbed corners as described under 2.10.1 may need protection, if mounted in an exposed position.



SCHOTT® Flat Glass

Delivery Specifications

Appendix

All information given on the strength of glass must take into account its specific material characteristics.

A 1. Strength

Technologically, glasses are ideally elastic¹⁾ brittle materials, in which flow processes do not occur. If in contact with analogously hard materials, this causes the occurrence of surface defects in the form of fine score lines and cracks. In addition with mechanically loaded glasses, critical excess stresses at the tips of such score lines and cracks cannot be reduced by plastic flows, as in the case of metals.

As a result of this behavior, the high strength of glasses attributable to the structure is virtually without any significance; it is reduced to a practical tensile strength range of values from approx. 20 – 200 N/mm². This is by the action of inevitable surface defects (when the surface is unprotected) due to practical use and thus depending on the state of the surface and also the test conditions.

Consequently, the strength of glass is not a material constant (or the density) and depends on

- the state of machining
- the conditions of use (type and distribution of surface defects)
- the derivative trend with respect to time and the effective duration of tensile stress
- the surrounding medium
- the (tensile) stress surface / format

It is in line with the type and distribution of the surface defect and is subject to statistical distribution.

As for practice, the term “technical strength” has proved useful; it is understood to include the permanent and expected strength of a glass object, taking into consideration all surface injuries, which the said object may suffer from knocks or chafing in the course of its use.

¹⁾ “Ideally elastic” is a term referring to a material between stress and deformation. In the case of fracture, there is a linear interrelation. The “brittle” material does not exhibit the ability of toughened steel to reduce stress by plastic deformations.



SCHOTT AG

Hattenbergstrasse 10

55122 Mainz

Germany

Phone +49 (0)6131/66-0

Fax +49 (0)6131/66-2000

info.flatglass@schott.com

www.schott.com